



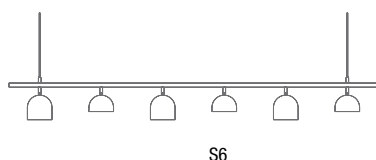
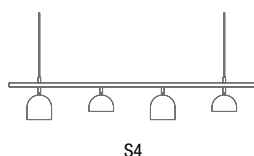




Dome

.24 bianco/white
.35 nero/black



Art./Code	Note	Dimensions cm	Bulb	€ IVA esclusa
AP 056.054.02 CE	.24	P 16 cm H 35 cm orientabile/orientable	8W 220V LED K° 3.000 con lente ottica/ with optical lens	250,00
	.35			
APG 056.054.01 CE	.24	P 22 cm H 40 cm orientabile/orientable	8W 220V LED K° 3.000 con lente ottica/ with optical lens	274,00
	.35			
S 055.054.01 CE	.24	Ø12 cm H 95 cm orientabile/orientable	8W 220V LED K° 3.000 con lente ottica/ with optical lens	230,00
	.35			
* S2 10 055.054.02 CE	.24	L60 cm H 30 cm orientabile/orientable	16W 220V LED K° 3.000 con lente ottica/ with optical lens	430,00
	.35			
** S2 50 055.054.03 CE	.24	L60 cm H 70 cm orientabile/orientable	16W 220V LED K° 3.000 con lente ottica/ with optical lens	440,00
	.35			
* S4 10 055.054.04 CE	.24	L120 cm H 30 cm orientabile/orientable	32W 220V LED K° 3.000 con lente ottica/ with optical lens	774,00
	.35			
** S4 50 055.054.05 CE	.24	L120 cm H 70 cm orientabile/orientable	32W 220V LED K° 3.000 con lente ottica/ with optical lens	784,00
	.35			
* S6 10 055.054.06 CE	.24	L180 cm H 30 cm orientabile/orientable	48W 220V LED K° 3.000 con lente ottica/ with optical lens	1.118,00
	.35			
** S6 50 055.054.07 CE	.24	L180 cm H 70 cm orientabile/orientable	48W 220V LED K° 3.000 con lente ottica/ with optical lens	1.128,00
	.35			
LP 052.054.01 CE	.24	base Ø16 cm H 37,5 cm orientabile/orientable	8W 220V LED K° 3.000 con lente ottica/ with optical lens	312,00
	.35			
LPG 053.054.01 CE	.24	base Ø20 cm H 50 cm orientabile/orientable	8W 220V LED K° 3.000 con lente ottica/ with optical lens	344,00
	.35			
PL 70 055.054.01 CE	.24	Ø33 cm H 73 cm orientabile/orientable	32W 220V LED K° 3.000 con lente ottica/ with optical lens	380,00
	.35			
PL 100 055.054.10 CE	.24	Ø33 cm H 103 cm orientabile/orientable	32W 220V LED K° 3.000 con lente ottica/ with optical lens	395,00
	.35			
T 054.054.01 CE	.24	base Ø30 cm H 180 cm orientabile/orientable	24W 220V LED K° 3.000 con lente ottica/ with optical lens	812,00
	.35			

Tiges in metallo per modelli S2-S4-S6
Metal rods for models S2-S4-S6

* H 10
** H 50